

# SCHMIDT® PneumaticPress

## Control versions with force/stroke monitoring

Press-specific installation material


### Optional

- Ram drift lock to secure ram in home position when air supply has been removed.
- Force output preselector approx. 3...6 bar



### Single-channel control

(Integration of the press in an automatic installation)

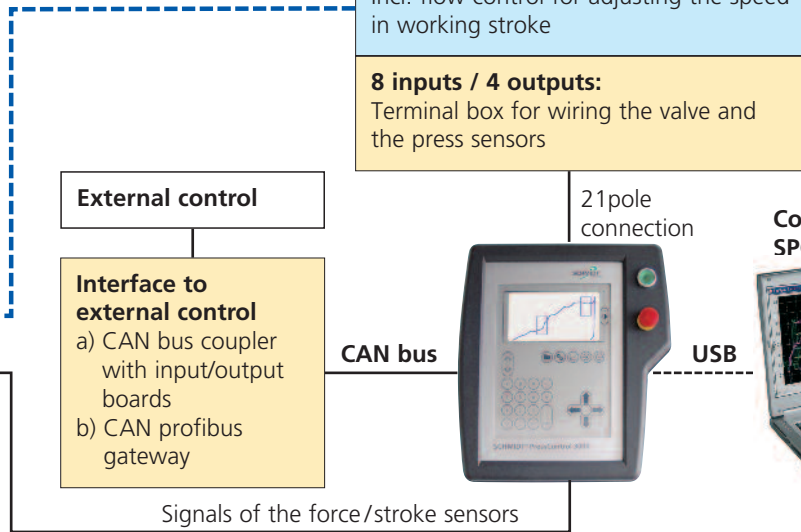

### Two-channel control

(With manual loading of the machine)

